


Positive rhombic 55°

DCMT

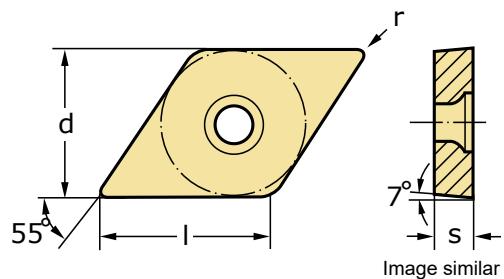


Designation	l mm ▲ ▼	r mm ▲ ▼	f mm ▲ ▼	a_p mm ▲ ▼	Materials
					P M K N S H O


	Geometry: RM4 (17)	7.75 - 11.63	0.4 - 1.2	0.12 - 0.4	0.4 - 4
	P M S				

	d	r	7°	s	
DCMT070204-RM4 WMP20S	7.75	0.4	0.12-0.2	0.4-2	
DCMT070204-RM4 WSM10S	7.75	0.4	0.12-0.2	0.4-2	
DCMT070204-RM4 WSM20S	7.75	0.4	0.12-0.2	0.4-2	
DCMT070204-RM4 WSM30S	7.75	0.4	0.12-0.2	0.4-2	
DCMT070208-RM4 WSM10S	7.75	0.8	0.16-0.3	0.6-2	
DCMT070208-RM4 WSM20S	7.75	0.8	0.16-0.3	0.6-2	
DCMT070208-RM4 WSM30S	7.75	0.8	0.16-0.3	0.6-2	
DCMT11T304-RM4 WMP20S	11.63	0.4	0.12-0.25	0.4-3	
DCMT11T304-RM4 WSM10S	11.63	0.4	0.12-0.25	0.4-3	
DCMT11T304-RM4 WSM20S	11.63	0.4	0.12-0.25	0.4-3	
DCMT11T304-RM4 WSM30S	11.63	0.4	0.12-0.25	0.4-3	

Designation	I mm	▲ ▼	r mm	▲ ▼	f mm	▲ ▼	a _p mm	▲ ▼	Materials					
	P	M	K	N	S	H	O							
DCMT11T308-RM4 WMP20S	11.63		0.8		0.16–0.35		0.6–4		✖	✖				
DCMT11T308-RM4 WSM10S	11.63		0.8		0.16–0.35		0.6–4		✖	✖	✖	✖		
DCMT11T308-RM4 WSM20S	11.63		0.8		0.16–0.35		0.6–4		✖	✖	✖	✖		
DCMT11T308-RM4 WSM30S	11.63		0.8		0.16–0.35		0.6–4		✖	✖	✖	✖		
DCMT11T312-RM4 WSM20S	11.63		1.2		0.2–0.4		0.8–4		✖	✖	✖	✖		
DCMT11T312-RM4 WSM30S	11.63		1.2		0.2–0.4		0.8–4		✖	✖	✖	✖		



DCMT070204-RP4 WPP10S	7.75		0.4		0.12–0.2		0.4–2		✖	✖	✖	✖		
DCMT070204-RP4 WPP20S	7.75		0.4		0.12–0.2		0.4–2		✖	✖	✖	✖		
DCMT070204-RP4 WPP30S	7.75		0.4		0.12–0.2		0.4–2		✖	✖	✖	✖		
DCMT070208-RP4 WPP10S	7.75		0.8		0.16–0.3		0.6–2		✖	✖	✖	✖		
DCMT070208-RP4 WPP20S	7.75		0.8		0.16–0.3		0.6–2		✖	✖	✖	✖		
DCMT070208-RP4 WPP30S	7.75		0.8		0.16–0.3		0.6–2		✖	✖	✖	✖		
DCMT11T304-RP4 WPP10S	11.63		0.4		0.12–0.25		0.4–3		✖	✖	✖	✖		
DCMT11T304-RP4 WPP20S	11.63		0.4		0.12–0.25		0.4–3		✖	✖	✖	✖		
DCMT11T304-RP4 WPP30S	11.63		0.4		0.12–0.25		0.4–3		✖	✖	✖	✖		
DCMT11T308-RP4 WPP10S	11.63		0.8		0.16–0.35		0.6–4		✖	✖	✖	✖		
DCMT11T308-RP4 WPP20S	11.63		0.8		0.16–0.35		0.6–4		✖	✖	✖	✖		
DCMT11T308-RP4 WPP30S	11.63		0.8		0.16–0.35		0.6–4		✖	✖	✖	✖		
DCMT11T312-RP4 WPP10S	11.63		1.2		0.2–0.4		0.8–4		✖	✖	✖	✖		
DCMT11T312-RP4 WPP20S	11.63		1.2		0.2–0.4		0.8–4		✖	✖	✖	✖		
DCMT11T312-RP4 WPP30S	11.63		1.2		0.2–0.4		0.8–4		✖	✖	✖	✖		



Designation	I mm	▲ ▽	r mm	▲ ▽	f mm	▲ ▽	a _p mm	▲ ▽	Materials						
	P	M	K	N	S	H	O								
DCMT070204-RK4 WKK10S	7.75		0.4		0.12–0.2		0.4–2			⊕					
DCMT070204-RK4 WKK20S	7.75		0.4		0.12–0.2		0.4–2			⊕					
DCMT070208-RK4 WKK10S	7.75		0.8		0.16–0.3		0.6–2			⊕					
DCMT070208-RK4 WKK20S	7.75		0.8		0.16–0.3		0.6–2			⊕					
DCMT11T304-RK4 WKK10S	11.63		0.4		0.12–0.25		0.4–3			⊕					
DCMT11T304-RK4 WKK20S	11.63		0.4		0.12–0.25		0.4–3			⊕					
DCMT11T308-RK4 WKK10S	11.63		0.8		0.16–0.35		0.6–4			⊕					
DCMT11T308-RK4 WKK20S	11.63		0.8		0.16–0.35		0.6–4			⊕					
DCMT11T312-RK4 WKK10S	11.63		1.2		0.2–0.4		0.8–4			⊕					
DCMT11T312-RK4 WKK20S	11.63		1.2		0.2–0.4		0.8–4			⊕					